


ASC CS220

CALCIUM SILICATE INSULATION

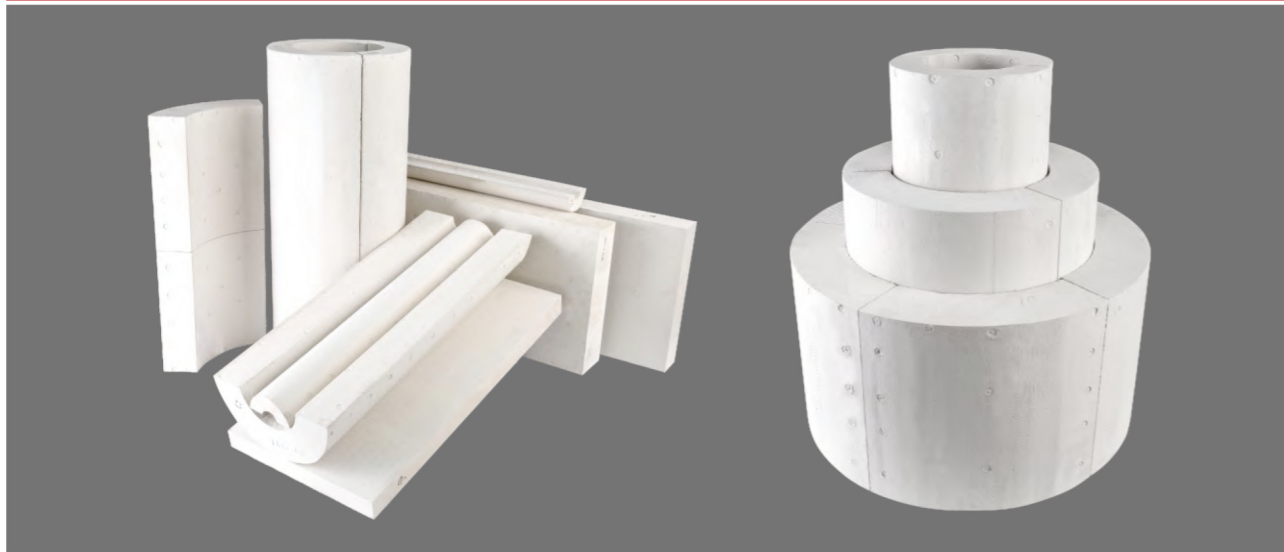

It is the microcellular structured inorganic rigid and super-light heat insulation material mainly composed of inorganic siliceous and calcium and made by special technology such as the hydrothermal reaction under high temperature and high pressure etc. And it's the national inspection-free product that has firstly won the ISO9001 certification in the same industry. It can still maintain the high insulating effect at 650°C and is advantageous in the stability of coping with temperature changes. With super-low chloride ion content, it can provide very nice protection on pipelines, and is prefabricated to shape up, greatly extending the service life. Additionally, the company has kept upgrading product technology to improve product, reducing the product density from 220kg/m³ to 180kg/m³ while maintaining its strength, thus reducing the thermal conductivity from 0.065 to 0.049.

Advantages :

A1 / Asbestos Free:

Made from algous fossil from hundreds of millions of years ago, the product is entirely asbestos-free and non-poisonous to human body.

A2 / Superior Strength:

With similar density, the strength of this material is the highest among all the inorganic rigid insulation materials with better compressive performance and is not easy to bend, Compared with ASC CS170, ASC CS220 product has better physical strength.

A3 / Good Anti-corrosion:

The super low chloride ion content and alkalescence have good protection for metal pipes, which greatly prolongs the service life of pipes and equipment and greatly reduces maintenance cost, bringing lasting protection and better durability.

A4 / Wonderful Non-combustibility:

The product passed the EC certificate test by Germanischer Lloyd and has been identified as non-combustible material. It also passed the test by National Center for Quality Supervision and Testing of Fire Building Materials which identifies it as Grade A1 incombustible material.

A5 / Good Stability:

Long time soaking in water will not lead to pulverization. Various performance remains stable after drying.

A6 / Excellent Soundproofing Performance:

Great soundproofing effectively reduces industrial noises.

Applicable Scope :

It's applicable to equipment and pipeline facilities in petroleum refinery, chemical industry, hydroelectricity, nuclear power, thermal power and city heat supply network.

Technical Data :

TERM	UNIT	ASTM C533	JIS A9510	ZHEJIANG ASKE	
Density	Kg/m ³	≤250	≤220	≤220	
Maximum Service Temperature	°C	650	650	650	
Thermal Conductivity per ASTM C518/C1114	(50°C)	≤0.060	●	≤0.052	
	(93°C)	≤0.065	≤0.065	≤0.0535	
	(100°C)	●	≤0.065	●	
	(149°C)	≤0.072	●	≤0.054	
	(200°C)	≤0.079	≤0.077	≤0.056	
	(260°C)	≤0.087	●	≤0.0757	
	(300°C)	●	≤0.088	●	
	(371°C)	≤0.102	●	≤0.0923	
	(400°C)	●	≤0.106	●	
	(500°C)	●	≤0.127	≤0.098	
(538°C)	≤0.111	●	≤0.1002		
Linear Heat Shrinkage per ASTM C 356	%	≤2.0	≤2.0	≤1.3	
Flexural Strength per ASTM C 203	MPa	≥0.344	≥0.30	≥0.36	
Compressive Strength per ASTM C 165	MPa	≥0.689	≥0.45	≥0.85	
Weight Loss by Tumbling per ASTM C 421 (First 10 minutes)	%	≤20	●	≤10	
Weight Loss by Tumbling per ASTM C 421 (Second 10 minutes)	%	≤40	●	≤20	
Hot Surface Performance per ASTM C 411 (650°C)	CM	≤0.635 (No through-cracking)	●	≤0.635 (No through-cracking)	
Surface Burning Characteristics per ASTM E841	Flame Spread Index	●	0	●	0
	Smoke Developed Index	●	0	●	0
Moisture Content per ASTM C 1616	%	≤20	●	≤4	
Non-Combustible Property per ASTM E 136		●	Pass	●	Pass
Chlorine Content		●	ASTM C795	●	ASTM C795

Item	Slab	Curved	Pipe
Length(mm)	600	600	600
Width(mm)	300/150	150/100	0.5"- 60"(inside diameter)
Thickness(mm)	25-100	25-100	25-100

Remark:

Packed in standard export cartons with plastic bags inside used for waterproofing. Carton Size : 580(L)*320(W)*620(H)mm, 40HQ : 576BOXES, 20HQ : 252BOXES. Pallets can be made according to customers' requirements. Standard sizes showed as above. For further information, including nonstandard sizes, please contact Zhejiang ASKE.